


SIDE ENTRY AGITATORS

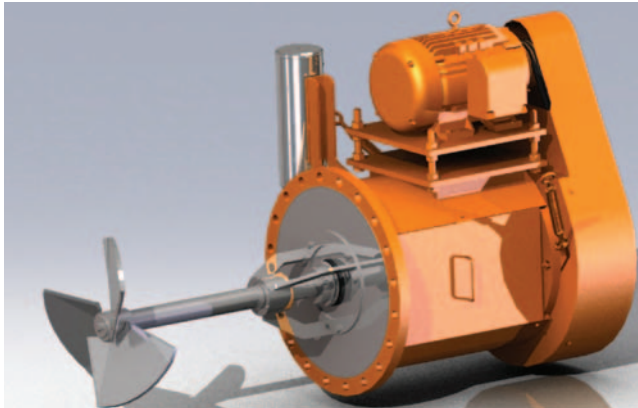

ProQuip has a full range of side entry agitators. Both belt drive and gear driven designs are available for demanding applications, including digesters, bulk storage, and asphalt.

Horsepower and Speed Ranges:

Small 1-10HP @ 120-420 RPM
Medium 15-30HP @ 150-500 RPM
Large 40-100HP @ 150-420 RPM

Shafts and Impellers:

Engineered for each application. Full range of impeller designs to provide excellent mixing and trouble free performance.

Bearings:

Heavy duty lubricated bearings with 50,000 hour minimum L-10 bearing lives that are easily maintained are used.

Housing Designs:

Fabricated for rigidity to provide long-term operation. Supported by guide rods or foot mounted with outboard pedestal supports

Positive Shutoff Devise:

Permits bearings and mechanical seals to be changed under full head.

Shaft Seals:

Complete range of seals available including stuffing box, single mechanical and double mechanical seals.

GUARANTEE

ProQuip, Inc. accepts full responsibility for furnishing suitable equipment which shall be fit for the purpose which it is required, and for its successful operation under the conditions for which it was specified

ProQuip, Inc.
**Designers and Manufacturers of
Agitation Equipment**
850 East Highland Road
Macedonia, Ohio 44056-2190 USA
330-468-1850 • (fax) 330-467-3724
www.proquipinc.com
sales@proquipinc.com